

NEW

# Polarization Extinction Ratio Meter PEM-330

The PEM-330, polarization extinction ratio (PER) meter enables rapid and accurate polarization axis alignment of optical components to a PMF (Polarization Maintaining Fiber). The PEM-330 incorporates a powerful GPIB interface enabling full system integration and production line automation. In addition, to facilitate automatic alignment of diode lasers to optical fibers, an analog power monitor with 1kHz response time is available. With this addition, both translational and rotational fiber alignment can be controlled automatically.



## Features


- ▶ Full band 1260-1630nm
- ▶ Simultaneous display of extinction ratio, optical power, and polarization angle
- ▶ 40 dB dynamic range for PER measurement
- ▶ Wide dynamic range for input power (-30 to +10 dBm)
- ▶ Direct PD analog output
- ▶ Real-time (up to 10Hz) measurement
- ▶ Option utility software (for controlling instrument and acquiring/storing data)

## Applications

- ▶ Alignment of polarization axis of optical devices
- ▶ Connectorized PMF patch cord evaluation
- ▶ PMF pigtailed laser diodes evaluation

## Ordering Code

PEM-330-**A**-**B**-**C**

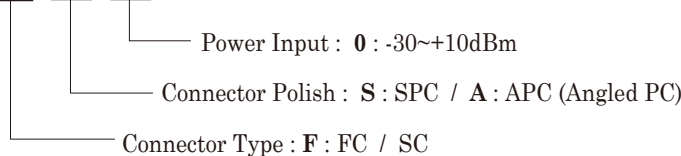

## Specification

Parameter	Unit	Spec
Wavelength Range	nm	1260 - 1630nm
PER Dynamic Range	dB	40
PER Resolution	dB	0.1
PER Accuracy	dB	<±0.3 *1
Input Power	dBm	-30 - +10
Power Resolution	dB	0.01
Power Accuracy	dB	<±0.1 *2
Polarization Angle Resolution	deg	0.12 *3
Polarization Angle Accuracy	deg	<±0.45
Measurement Speed	sec	0.1/ 0.2/ 0.4
Interface	-	GP-IB, RS-232C
Operating Temperature	°C	0-40
Size (W) x (D) x (H)	mm	210x300x80
Weight	kg	3
Supply Voltage	V	AC100-240
Max. Power consumption	W	35VA

\*1: Temperature:20-30°C, PER<30dB, Measurement Speed:2.5Hz

\*2: Calibrated wavelength:1310nm / 1550nm

\*3: Measurement Speed:2.5Hz

www.santec.com E-Mail : sales@santec.com

2008 © SANTEC CORPORATION Santec reserves the right to make changes in equipment design, components or specifications without notice.



**SANTEC CORPORATION**  
5823 Ohkusa-Nenjoyozaka, Komaki, Aichi 485-0802, Japan Tel. +81-568-79-1959 Fax +81-568-79-1718

**SANTEC U.S.A. CORPORATION**  
433 Hackensack Ave., Hackensack, NJ 07601, U.S.A. Toll Free +1-800-726-8321(santec-1) Tel. +1-201-488-5505 Fax +1-201-488-7702

**SANTEC EUROPE LIMITED**  
Magdalen Centre, Robert Robinson Ave., The Oxford Science Park, Oxford OX4 4GA, U.K. Tel. +44-1865-784960 Fax +44-1865-784961

**SANTEC (SHANGHAI) Co., Ltd.**  
No.800 Zhangyang Road Changhang Tower, Pudong District, Shanghai 200122 China Tel: +86-21-58361261, +86-21-58361262 Fax: +86-21-58361263