


■ Typical Spectrum

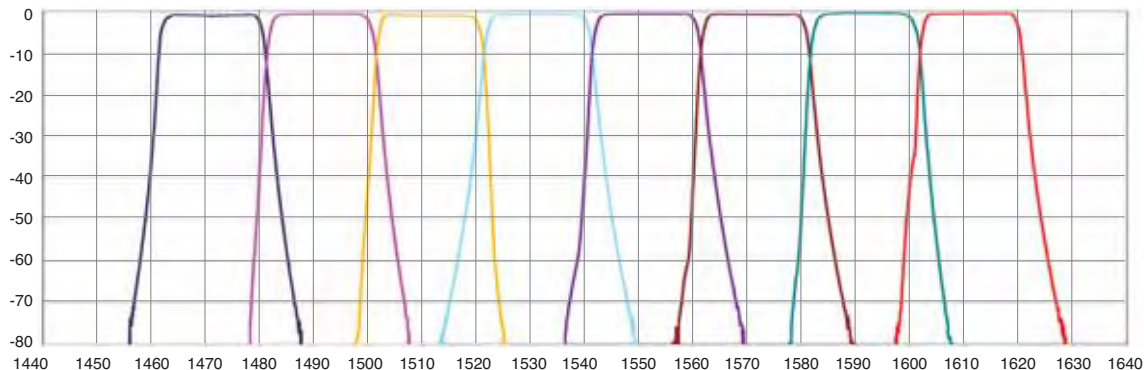

■ Specifications

No.	Parameter	Min	Max	Unit	Notes
1	Channel Spacing	20		nm	
2	Center Wavelength	1471, 1491, 1511, 1531 1551, 1571, 1591, 1611		nm	
3	Passband	13	-	nm	
4	Insertion Loss (Mux)	-	1.5	dB	In passband
5	Insertion Loss (Demux)	-	1.5	dB	In passband
6	Mux /Demux Link Loss	-	2.5(Typ.2.0)	dB	In passband
7	Adjacent Isolation	30	-	dB	
8	Non-Adjacent Isolation	50	-	dB	
9	PDL	-	0.2	dB	In passband
10	Directivity	-	50	dB	
11	Operating Temperature	0	70	°C	Non-condensing
12	Storage Temperature	-40	85	°C	Non-condensing
13	Fiber Length	1.05 ± 0.05		m	
14	Fiber Type	900µm SMF-28		-	
15	Package Dimensions	29 x 55 x 8		mm	

■ Ordering Code

C-CWDM-A-B-10-D/E

A: Number of Channel : **08**: 8 channels

B: Mux or Demux : **M**: Mux **D**: Demux

D: Connector Type : **00**: None **FS**: FC-SPC **FA**: FC-APC **SS**: SC-SPC

SA: SC-APC **LC**: LC-SPC **MU**: MU-SPC **MJ**: MUJ-SPC

E: Shortest Wavelength: **1471**: 1471.00nm

www.santec.com E-Mail : sales@santec.com

2005 © SANTEC CORPORATION Santec reserves the right to make changes in equipment design, components or specifications without notice.



SANTEC CORPORATION

5823 Ohkusa-Nenjoyozaka, Komaki, Aichi 485-0802, Japan Tel. +81-568-79-1959 Fax +81-568-79-1718

SANTEC U.S.A. CORPORATION

433 Hackensack Ave., Hackensack, NJ, 07601, U.S.A. Toll Free +1-800-726-8321 (santec-1) Tel. +1-201-488-5505 Fax +1-201-488-7702

SANTEC EUROPE LIMITED

Magdalen Centre, Robert Robinson Ave., The Oxford Science Park, Oxford OX4 4GA, U.K. Tel. +44-1865-784960 Fax +44-1865-784961

SANTEC (SHANGHAI) Co., Ltd.

No.800 Zhangyang Road Changhang Tower, Pudong District, Shanghai 200122 China Tel: +86-21-58361261, +86-21-58361262 Fax: +86-21-58361263