

## 3 Port Add/ Drop Module WDM-15

Optimize your add/drop applications with Santec's WDM filters. Our standard WDM filters cover the ITU grid in C and L-bands for 100, 200, and 400GHz channel spacing, with custom filter profiles available upon request.

Fully tested for long term reliability these units boast high isolation as well as low insertion loss.

### Features

- ▶ Low loss, low PDL
- ▶ High channel isolation
- ▶ Compact size for system integration
- ▶ Telcordia GR-1221 qualified
- ▶ RoHS compliant

### Model Variations

Each type of filter has optimized performance (passband and isolation), designed specifically for adding or dropping channels in 100, 200 and 400 GHz spaced systems.


The center wavelength can be selected from any standard ITU grid wavelengths.

### Applications

- ▶ DWDM channel add / drop
- ▶ Multi-channel multiplexer / demultiplexer



### Dimensions

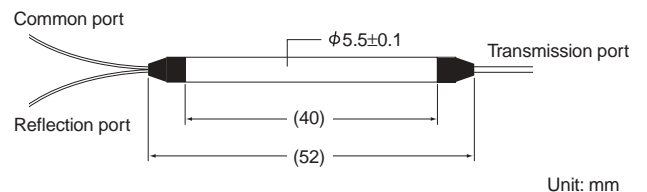

## Typical Performance

Parameter	Units		
Centre Wavelength	-	nm	1550 nm window, ITU grid wavelengths
Thermal Stability (Wavelength)	Typ.	nm / °C	≤0.005
Directivity	Min.	dB	45
Return Loss	Min.	dB	45
Polarization Dependent Loss (PDL)	Max.	dB	0.15
Polarization Mode Dispersion (PMD)	Max.	ps	0.1
Optical Power	Max.	dBm	23
Operating Temperature	-	°C	-5 to +70
Storage Temperature	-	°C	-40 to +85

## 100 GHz Filter Specifications

Parameter	Units		Add	Drop
Passband Width (-0.5dB Bandwidth)	Min.	nm	± 0.11	
Flatness	Max.	dB	0.5	
Insertion loss	Max.	dB	1.2	
Adjacent Channel Isolation	Min.	dB	12	25
Non-adjacent channel Isolation	Min.	dB	-	40
Insertion Loss of Reflect Channels	Max.	dB	0.5	
Reflect Channel Isolation	Min.	dB	12 (Typ. 15)	

## 200 GHz Filter Specifications

Parameter	Units		Add	Drop
Passband Width (-0.5dB Bandwidth)	Min.	nm	± 0.20	± 0.20
Flatness	Max.	dB	0.5	
Insertion loss	Max.	dB	1.2	
Adjacent Channel Isolation	Min.	dB	13	30
Non-adjacent channel isolation	Min.	dB	-	40
Insertion Loss of Reflect Channels	Max.	dB	0.5	
Reflect Channel Isolation	Min.	dB	12 (Typ. 15)	

- \*1 All parameters are specified over operating temperature range.  
 \*2 Insertion loss per filter includes Ripple and PDL, without connectors.  
 \*3 Please contact Santec to discuss specific performance requirements.

## Ordering Code

# WDM-15 - A - B - C - D / E

### A=Channel

1=1ch

### B=Type

10A0=100GHz Add / 10D0:100GHz Drop / 20A0:200GHz Add

20D0=200GHz Drop

### C=Fiber Length

10=1.0m, 20=2.0m

### D=Connector

00=No Connector, FS=FC-SPC, FA=FC-APC, SS=SC-SPC, SA=SC-APC

MU=MU-SPC, MJ=MUJ-SPC, LC=LC-SPC

### E=Center Wavelength

(ex) 1552.52nm --->1552.52

www.santec.com E-Mail : sales@santec.com

2005 © SANTEC CORPORATION Santec reserves the right to make changes in equipment design, components or specifications without notice.



### SANTEC CORPORATION

5823 Ohkusa-Nenjyozaka, Komaki, Aichi 485-0802, Japan Tel. +81-568-79-1959 Fax +81-568-79-1718

### SANTEC U.S.A. CORPORATION

433 Hackensack Ave., Hackensack, NJ, 07601, U.S.A. Toll Free +1-800-726-8321 (santec-1) Tel. +1-201-488-5505 Fax +1-201-488-7702

### SANTEC EUROPE LIMITED

Magdalen Centre, Robert Robinson Ave., The Oxford Science Park, Oxford OX4 4GA, U.K. Tel. +44-1865-784960 Fax +44-1865-784961

### SANTEC (SHANGHAI) Co., Ltd.

No.800 Zhangyang Road Changhang Tower, Pudong District, Shanghai 200122 China Tel: +86-21-58361261, +86-21-58361262 Fax: +86-21-58361263