

**NEW** Liquid Crystal Based Spatial Light Modulator  
**Ultra Violet and Full-HD model / SLM-250**

Santec introduces an Ultra Violet (UV) durable spatial light modulator (SLM-250). This product is a world's first for two-dimensional SLM, extending their use into the UV band. The UV hardened SLM-250 has 42 times UV durability when compared to standard SLM devices. A power density up to 10mW/cm<sup>2</sup> is sustainable using a novel liquid crystal and dielectric mirror design. The SLM-250 follows the popular first generation, HD-LCOS, SLM-150 from Santec model. The SLM-150 is suitable for various scientific and industrial applications, including beam shaping, wavefront correction and optical manipulations.


**UV Hardened  
 Full-HD LCOS**



**Applications**

- ▶ Beam steering
- ▶ Wavefront correction
- ▶ Pulse/Beam shaping
- ▶ Diffractive optics
- ▶ Optical manipulation
- ▶ Programmable phase pattern

**Measurement**

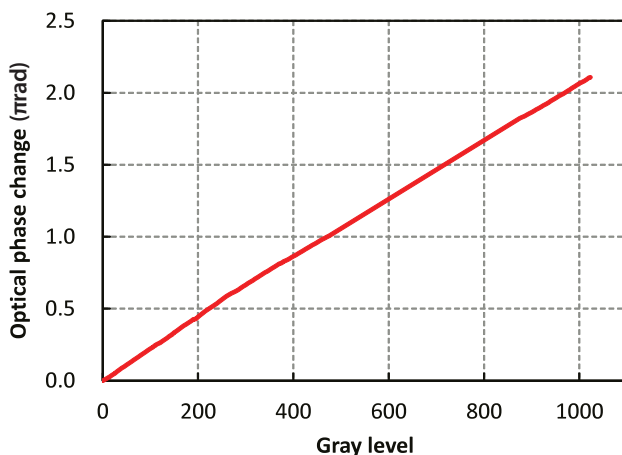

**Features**

- ▶ WUXGA (1920 x 1200) and Full-HD (1920 x 1080) available
- ▶ Low stress design and easy mount LCOS head
- ▶ Frame rate, x2 (120Hz)
- ▶ Memory function
- ▶ Triggers-input & output

## ■ Specifications

Item	min	max	Units	Notes
Wavelength range	365	550	nm	
AR coat range	365	550	nm	
AR coat reflectance	-	0.7	%	Angle of incidence = 0 degree
Panel size	(H)15.36 x (V)9.60		mm	Active area
Pixel resolution	(H)1920 x (V)1200		pixel	
Pixel size / pitch	7.8 / 8.0		μm	
Panel reflectivity	Typ. >70		%	
Aperture ratio	95		%	
Gray level	10 (1024)		bit	
Frame rate	60 or 120		Hz	Factory default setting
LCOS drive frequency	1200		Hz	
Phase depth	2π	-	rad.	
Phase stability	Typ. <0.003π		rad.	
Response time	Typ. 50		ms	
Interface	DVI* / USB3.0		-	*10-bit using RGB 8-bit, 3 colors
Operating temperature range	15	35	degC	No condensation
Storage temperature	10	40	degC	No condensation
Optical power handling <sup>1)</sup>	Typ. 40		MW/cm <sup>2</sup>	Peak power @355nm, Pulse laser,pulse width 260psec, repetition rate 100Hz
	-	10.0	mW/cm <sup>2</sup>	@365nm, 24H/day continuous operation
Dimensions	122 x 122 x 38.3		mm	
Control software	GUI software and SDK for Windows		-	

1) The value is not guaranteed. Please refer santec SLM technical sheet in one instance for judgement of useable light power.

## ■ Ordering Code

# SLM-250

[www.santec.com](http://www.santec.com)

2020 © SANTEC CORPORATION Santec reserves the right to make changes in equipment design, components or specifications without notice.



### SANTEC CORPORATION

5823 Ohkusa-Nenjozaka, Komaki, Aichi 485-0802, Japan Tel. +81-568-79-3536 Fax +81-568-79-1718

### SANTEC U.S.A. CORPORATION

433 Hackensack Ave., Hackensack, NJ 07601 USA Toll Free +1-800-726-8321(santec-1) Tel. +1-201-488-5505 Fax +1-201-488-7702

### SANTEC EUROPE LIMITED

Grand Union Studios, 332 Ladbroke Grove, London W10 5AD, UK Tel. +44-20-3176-1550

### SANTEC (SHANGHAI) Co., Ltd.

11F Room E, Hua Du Bldg., No.838 Zhangyang Road, Pudong, Shanghai 200122 China Tel: +86-21-58361261, +86-21-58361262 Fax: +86-21-58361263