

# Wavelength Selectable Laser WSL-100


The WSL-100 is a compact and cost effective tunable laser source. Designed for use in fiber optic transmission testing, the WSL-100 can also be used for DWDM component evaluation and Coherent communications testing. C-band or L-band lasers are available, each covering a 38nm tuning range. The WSL-100 features Gridless tuning, allowing any wavelength to be accessed. An integrated wavelength locker ensures high wavelength accuracy and stability. This laser can be controlled either through the front panel or by using a GPIB interface, allowing full remote control and measurement automation.



## Features

- ▶ C-band or L-band tuning with high resolution
- ▶ Settable to any wavelength
- ▶ Fine tuning available with 1MHz resolution
- ▶ Narrow linewidth <100kHz
- ▶ High output power >+15dBm
- ▶ Integrated wavelength locker
- ▶ One or two ports per unit

## Measurement data

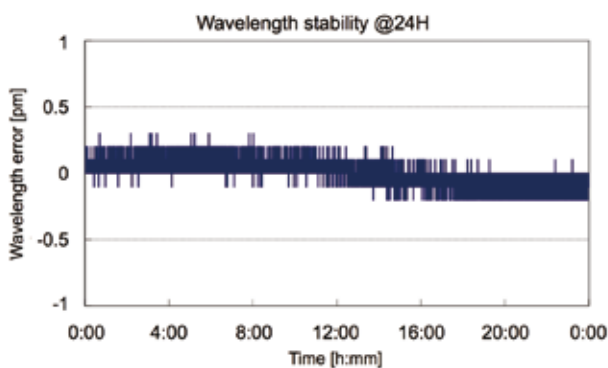

## Applications

- ▶ Fiber optic transmission testing
- ▶ DWDM component testing
- ▶ Coherent communications / Local oscillator
- ▶ Optical amplifier testing

## Graphical user interface



## Specifications

Parameter	Unit	Gridless tuning	
		C-band	L-band
<b>Wavelength</b>			
Wavelength Range	nm	1527.60 to 1565.50	1570.01 to 1608.76
Frequency Range	THz	191.50 to 196.25	186.35 to 190.95
Channel Spacing	GHz	25 (Any frequency is available.)	
Frequency Accuracy to ITU grid	GHz	<±2.5 / ±1.0 (typ.)	
	pm	<±20 / ±8 (typ.)	
Frequency Repeatability to ITU grid *1	GHz	±0.25 (typ.)	
	pm	±2 (typ.)	
Frequency Stability to ITU grid @1hour *1	GHz	±0.25 (typ.)	
	pm	±2 (typ.)	
Fine tune resolution	MHz	1 (typ.)	
Fine tune range	GHz	±6	
Output power tuning range	dBm	7 to 15.5	7 to 13.5
Power Variation *2	dB	±0.2 (typ.)	
Power Stability @1hour *1, *2	dB	±0.01 (typ.)	
Spectrum linewidth	kHz	<100	
Side mode suppression ratio (SMSR)	dB	>40 / 55 (typ.)	
Relative intensity noise *3	dB/Hz	-145 (typ.)	
Polarization extinction ratio	dB	>20	
Optical output connector	-	FC/APC or SC/APC	
Interface	-	GP-IB, USB	
Operating	Temperature	°C	
	Humidity	%	
Power supply	Voltage	V	
	Frequency	Hz	
Dimensions (Width x Depth x Height)	mm	210x300x80	
Weight	kg	2.8	

\*:All specifications are quoted after 1 hour warm-up period.

\*1:At constant temperature ± 0.5 K.

\*2:Measured by fiber with angled polished connector.

\*3:10MHz to 3GHz


## Laser safety information



This product is classified class 1M laser product according to IEC 60825-1 (2007).

This product complies with FDA performance standards for laser products except for deviations pursuant to Laser Notice No. 50 dated June 24, 2007.

## Ordering Code

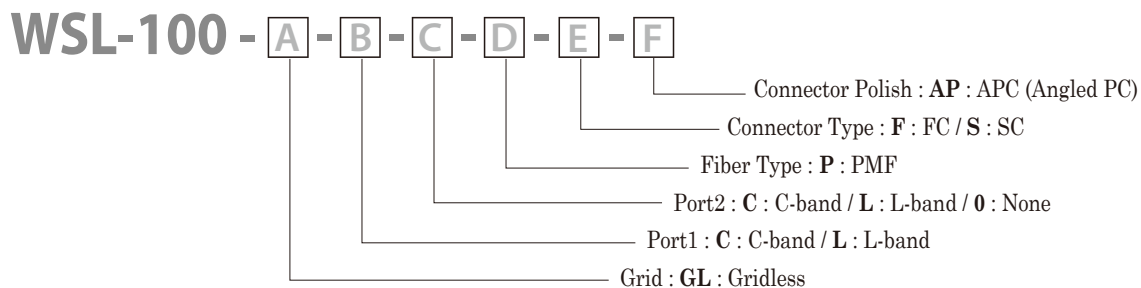

[www.santec.com](http://www.santec.com) E-Mail : [sales@santec.com](mailto:sales@santec.com)

2017 © SANTEC CORPORATION Santec reserves the right to make changes in equipment design, components or specifications without notice.



### SANTEC CORPORATION

5823 Ohkusa-Nenjoyozaka, Komaki, Aichi 485-0802, Japan Tel. +81-568-79-3536 Fax. +81-568-79-1718

### SANTEC U.S.A. CORPORATION

433 Hackensack Ave., Hackensack, NJ 07601 U.S.A. Toll Free. +1-800-726-8321(santec-1) Tel. +1-201-488-5505 Fax. +1-201-488-7702

### SANTEC EUROPE LIMITED

Grand Union Studios, 332 Ladbroke Grove, London W10 5AD Tel. +44-20-3176-1550

### SANTEC (SHANGHAI) Co., Ltd.

11F Room E, Hua Du Bldg., No.838 Zhangyang Road, Pudong, Shanghai 200122 China Tel: +86-21-58361261, +86-21-58361262 Fax: +86-21-58361263